


DATA SHEET

specifications

article number	S4LFT0420/126
design wavelength [nm]	1064
effective focal length [mm]	420.8
working distance [mm]	480.9
max. entrance beam-Ø [mm]	30.0
aperture stop distance [mm]	59.5
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	242 x 242 41.2 / 77.7
max. telecentricity error [°]	14.8
total transmission [%]	> 98
absorption [ppm]	not specified
lens material	optical glass
LIDT (coating)	5.0 J/cm ² per 1ns pulse at 50Hz
SP and USP usable	no
weight [kg]	1.5
cover glass	—
cleanliness	not specified

spot

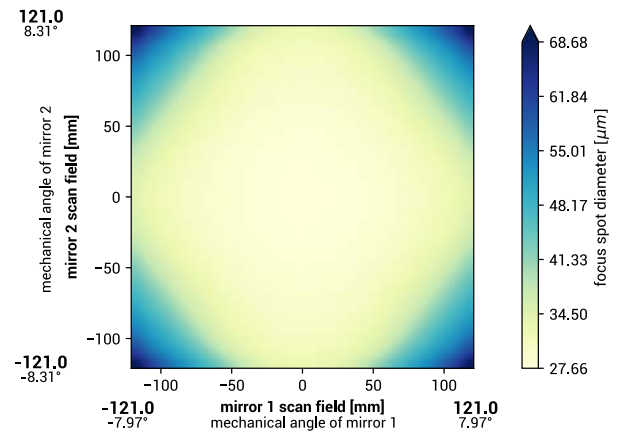

spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 30.0 mm diameter at $1/e^2$, clipped at 30.0 mm field size and mirror distances as given above for a two mirror scan system

back reflection positions

back reflections [mm] for 1064	
5.22	
13.95	
15.47	
100.23	
4.062.85	
0	
0	
0	
0	
0	

remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.