


# DATA SHEET

## S4LFT0508/126

F-Theta  
standard - optical glass  
1064 nm



### outline drawing

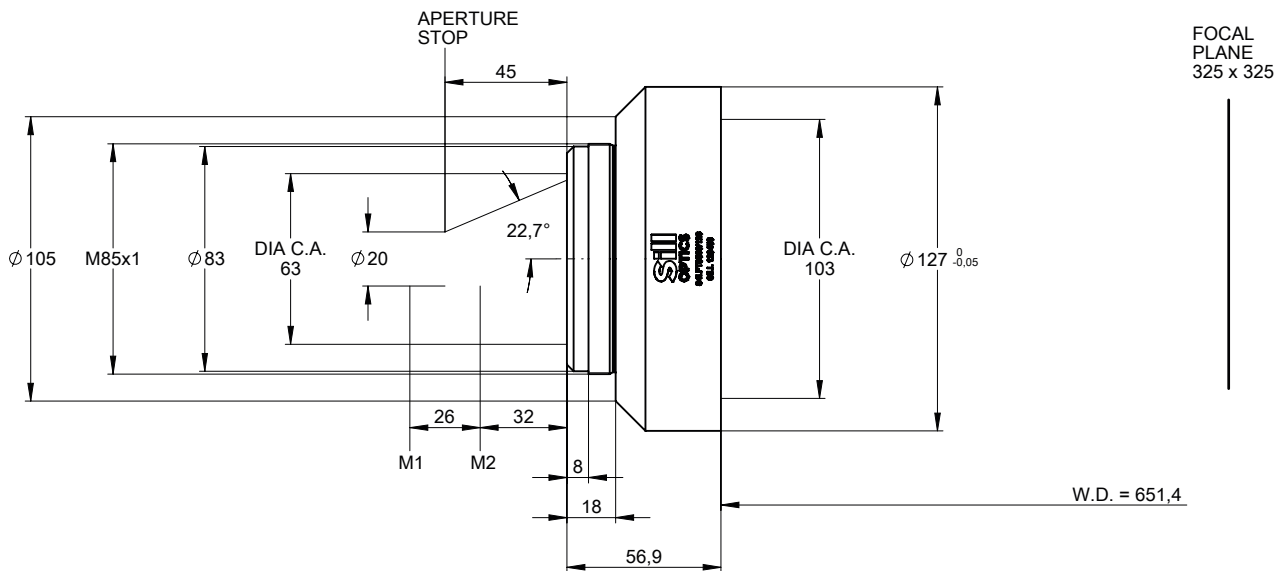


# DATA SHEET

## specifications

article number	S4LFT0508/126
design wavelength [nm]	1064
effective focal length [mm]	569.7
working distance [mm]	651.4
max. entrance beam-Ø [mm]	20.0
aperture stop distance [mm]	45
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	325 x 325 32.0 / 58.0
max. telecentricity error [°]	16.3
total transmission [%]	> 97
absorption [ppm]	not specified
lens material	optical glass
LIDT (coating)	5.0 J/cm <sup>2</sup> per 1ns pulse at 50Hz
SP and USP usable	no
weight [kg]	1.2
cover glass	—
cleanliness	not specified

## spot

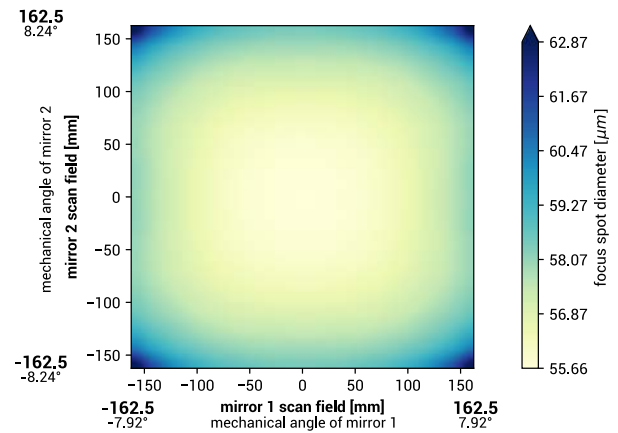

spot diameter at 86.5 % level for a Gaussian beam ( $M^2 = 1$ ) with 20.0 mm diameter at  $1/e^2$ , clipped at 20.0 mm field size and mirror distances as given above for a two mirror scan system

## back reflection positions

back reflections [mm] for 1064	
12.38	
32.4	
45.13	
238.79	
0	
0	
0	
0	
0	
0	

## remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.