

DATA SHEET


S4LFT1330/328

F-Theta
standard - fused silica
1030 - 1090 nm



illustration only

outline drawing

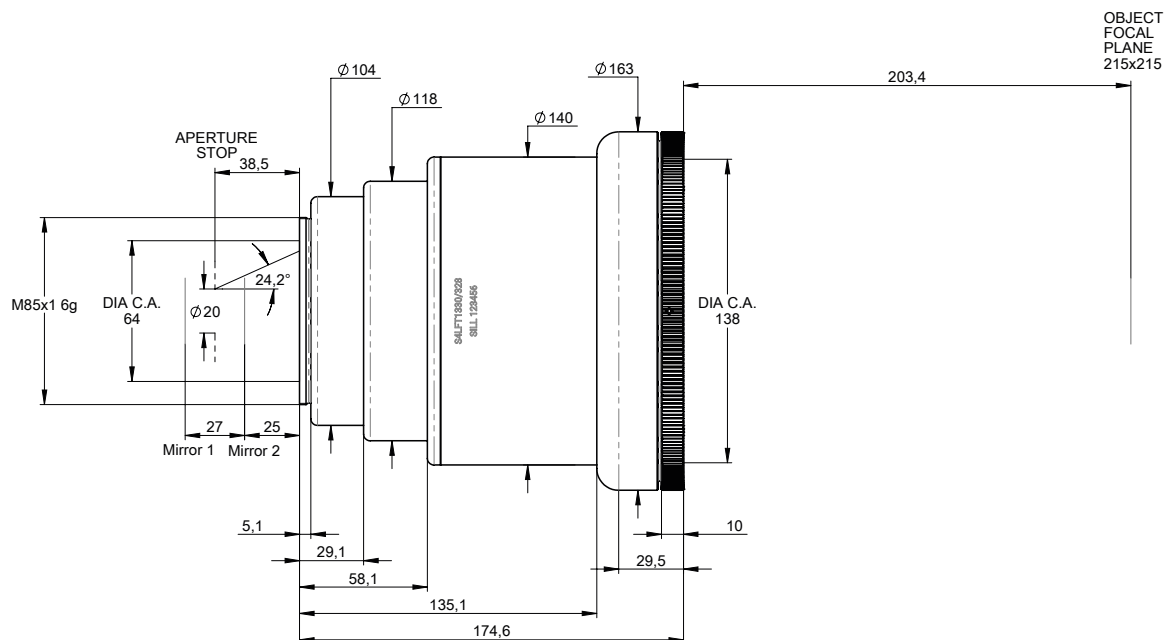


DATA SHEET

specifications

article number	S4LFT1330/328
design wavelength [nm]	1064
effective focal length [mm]	340.0
working distance [mm]	203.4
max. entrance beam-Ø [mm]	20.0
aperture stop distance [mm]	38.5
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	215 x 215 25.0 / 52.0
max. telecentricity error [°]	23.5
total transmission [%]	> 97
absorption [ppm]	112
lens material	fused silica
LIDT (coating)	5.0 J/cm ² per 1ns pulse at 50Hz
SP and USP usable	yes
weight [kg]	1.5
cover glass	S4LPG2175/328
cleanliness	not specified

spot

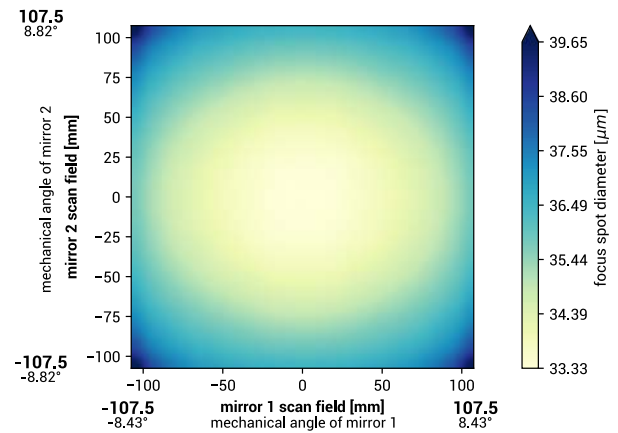

spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 20.0 mm diameter at $1/e^2$, clipped at 20.0 mm field size and mirror distances as given above for a two mirror scan system

back reflection positions

back reflections [mm] for 1064
1.68
74.37
78.05
81.78
308.99
631.68
0.00
0.00
0.00
0.00

remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.