

DATA SHEET




S4LFT3162/328

F-Theta
telecentric - fused silica
1030 - 1090 nm



outline drawing

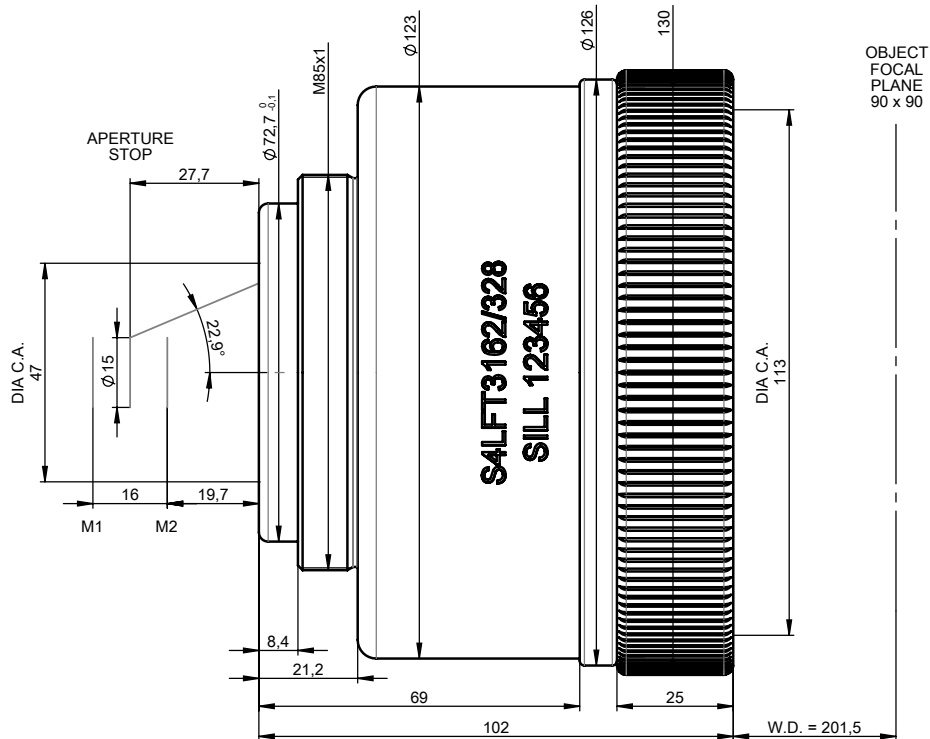


DATA SHEET

specifications

article number	S4LFT3162/328
design wavelength [nm]	1064
effective focal length [mm]	163.5
working distance [mm]	201.5
max. entrance beam-Ø [mm]	15.0
aperture stop distance [mm]	27.7
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	90 x 90 19.7 / 35.7
max. telecentricity error [°]	5.6
total transmission [%]	> 97
absorption [ppm]	105
lens material	fused silica
LIDT (coating)	5.0 J/cm ² per 1ns pulse at 50Hz
SP and USP usable	yes
weight [kg]	1.8
cover glass	S4LPG4160/328
cleanliness	not specified

spot

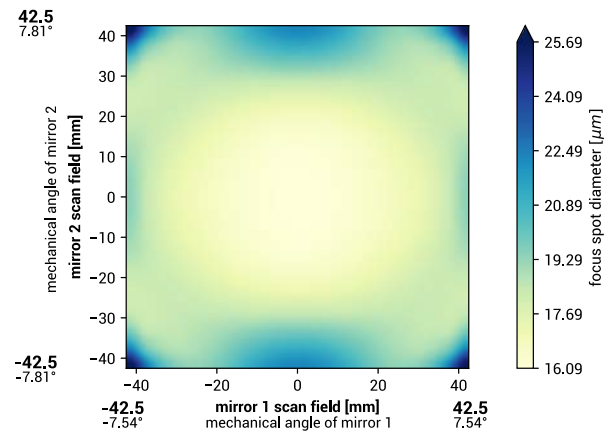

spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 15.0 mm diameter at $1/e^2$, clipped at 15.0 mm field size and mirror distances as given above for a two mirror scan system

back reflection positions

back reflections [mm] for 1064	
9.52	
10.16	
126.52	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	

remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.