


DATA SHEET

specifications

article number	S4LFT4067/075
design wavelength [nm]	355
effective focal length [mm]	65.5
working distance [mm]	81.7
max. entrance beam-Ø [mm]	15.0
aperture stop distance [mm]	24.0
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	15 x 15 16.0 / 32.0
max. telecentricity error [°]	1.8
total transmission [%]	> 97
absorption [ppm]	not specified
lens material	fused silica
LIDT (coating)	1.0 J/cm ² per 1ns pulse at 50Hz
SP and USP usable	yes
weight [kg]	1.0
cover glass	S4LPG0394/075
cleanliness	not specified

spot

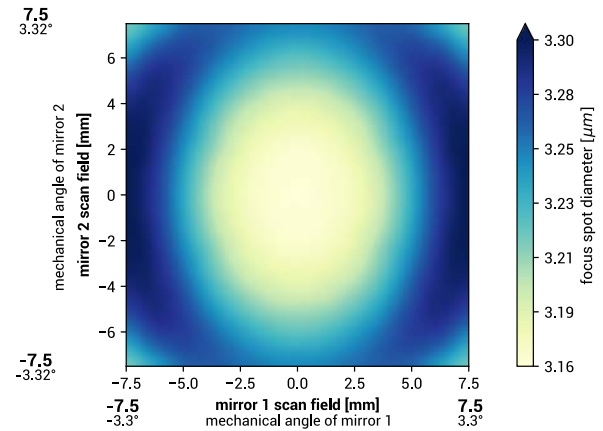

spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 10.0 mm diameter at $1/e^2$, clipped at 15.0 mm field size and mirror distances as given above for a two mirror scan system

back reflection positions

back reflections [mm] for 355	
23.91	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	

remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.