


DATA SHEET

S4LFT4263/199

F-Theta
telecentric - fused silica
266 nm



outline drawing

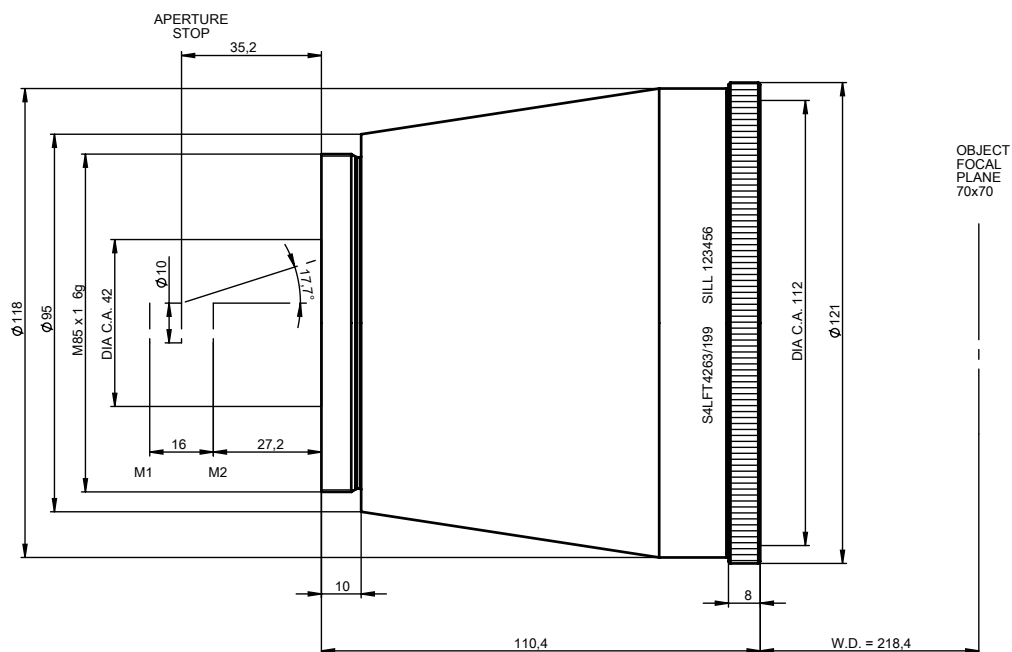


DATA SHEET

specifications

article number	S4LFT4263/199
design wavelength [nm]	266
effective focal length [mm]	162.9
working distance [mm]	218.4
max. entrance beam-Ø [mm]	10.0
aperture stop distance [mm]	35.2
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	70 x 70 27.2 / 43.2
max. telecentricity error [°]	2.6
total transmission [%]	> 98
absorption [ppm]	not specified
lens material	fused silica
LIDT (coating)	0.5 J/cm ² per 1ns pulse at 50Hz
SP and USP usable	yes
weight [kg]	1.7
cover glass	S4LPG4160/199
cleanliness	not specified

spot

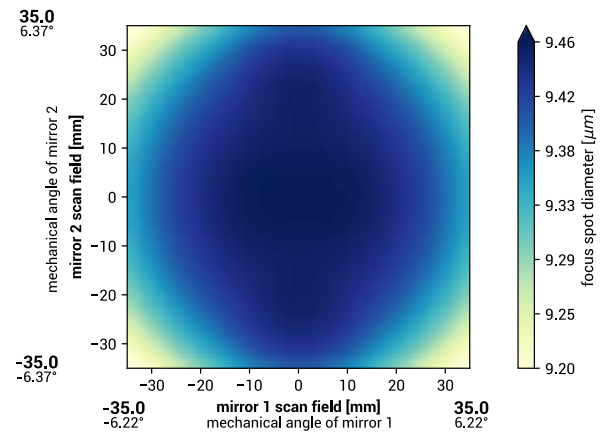

spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 6.0 mm diameter at $1/e^2$, clipped at 10.0 mm field size and mirror distances as given above for a two mirror scan system

back reflection positions

back reflections [mm] for 266	
1.90	
2.44	
645.13	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	
0.00	

remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.