

# DATA SHEET


## S4LFT8254/081

F-Theta  
multi-spectral  
532 + 1064 nm



illustration only

### outline drawing

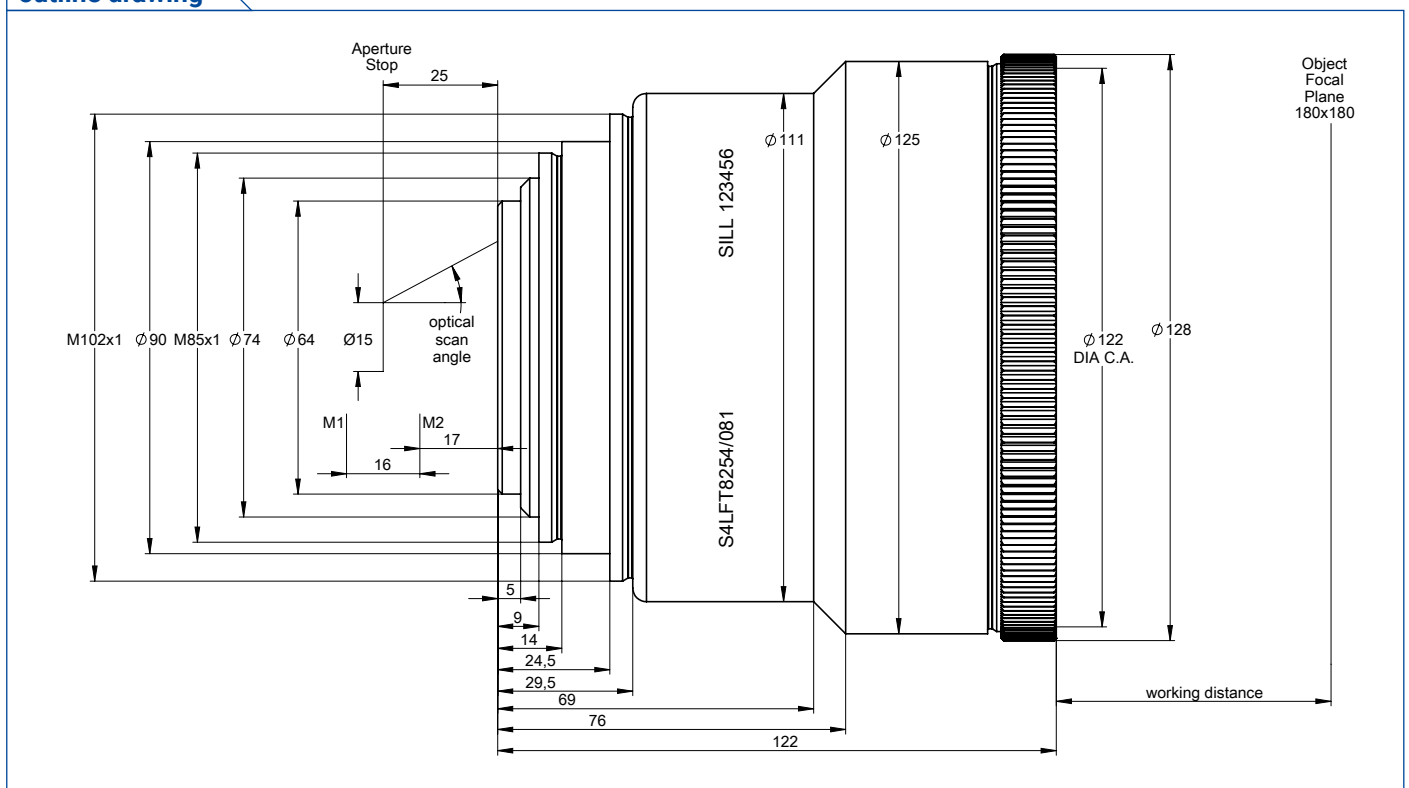

# DATA SHEET


## specifications

article number	S4LFT8254/081	
design wavelength [nm]	532	1064
effective focal length [mm]	254.0	253.9
max. entrance beam-Ø [mm]	15.0	
aperture stop distance [mm]	25	
working distance [mm]	211.6	211.4
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1	180 x 180	
	17.0 / 33.0	
max. telecentricity error [°]	19.7	19.6
lateral color shift [µm]		
chromatic focal shift [mm]		
total transmission [%]	> 94	> 95
lens material	optical glass	
LIDT (coating)	2.5 J/cm <sup>2</sup> per 1ns pulse at 50Hz	
SP and USP usable	no	
weight [kg]	2.2	
cover glass	S4LPG0300/081	
absorption [ppm]	not specified	
cleanliness	not specified	

## back reflection position


back reflections [mm]	
for 532 nm	for 1064 nm
0.44	0.60
1.23	1.08
12.46	10.46
21.52	20.70
24.41	25.46
35.34	33.71
57.79	56.92
59.63	57.30
60.75	58.77
0.00	0.00

## spot for 532 nm

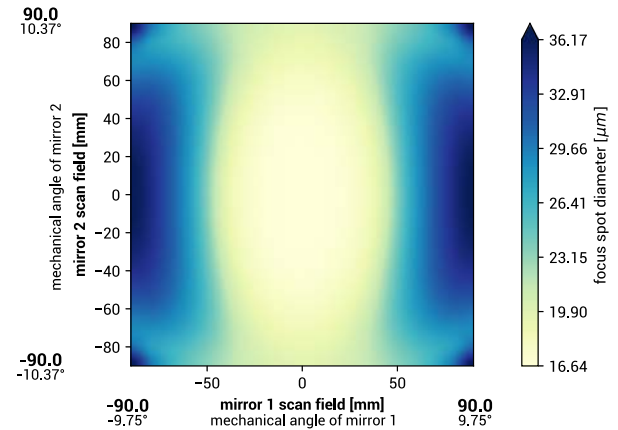

spot diameter at 86.5 % level for a Gaussian beam ( $M^2 = 1$ ) with 15.0 mm diameter at  $1/e^2$ , clipped at 15.0 mm field size and mirror distances as given above for a two mirror scan system

## spot for 1064 nm

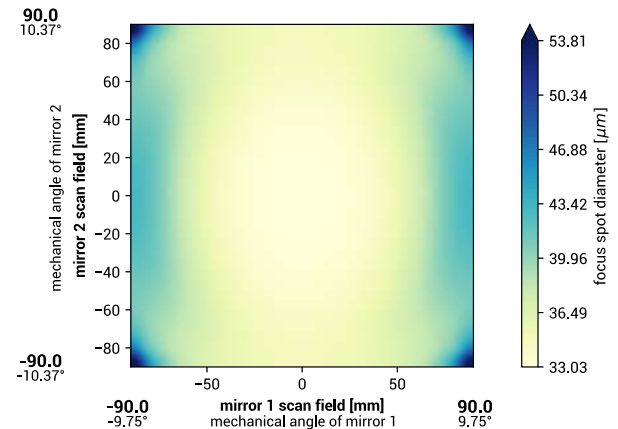

spot diameter at 86.5 % level for a Gaussian beam ( $M^2 = 1$ ) with 15.0 mm diameter at  $1/e^2$ , clipped at 15.0 mm field size and mirror distances as given above for a two mirror scan system

## remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.